

费罗娜®水泥瓷砖
水泥瓷砖开创者



FR-C22A003

Rovere / 超大尺寸
原色橡木

300×1800_{mm}

原色橡木



超大规格呈现
还原木纹质感

原色橡木系列产品，纹理取自天然橡木，
气质清新优雅、纹理活跃顺畅、风格素净简约。
清晰的木纹肌理，还原天然之美。

Rovere >



Rovere



Milk

奶白

R11



Floor
R11 | 300x1800mm / 12"x72"



Floor
R11 | 300x1800mm / 12"x72"

Rovere



Cream

米咖

R12



Floor
R12 | 300x1800mm /12"x72"

Wall
R12 | 300x1800mm /12"x72"



Floor
R12 | 300x1800mm /12"x72"

Wall
R12 | 300x1800mm /12"x72"

Rovere



Tan
浅棕

R13

Floor
R13 | 300x1800mm / 12"x72"



Floor
R13 | 300x1800mm / 12"x72"



Rovere



Camel

驼色

R14



Floor
R14 | 300x1800mm /12"x72"

Wall
U9 | 600x1200mm /12"x48"

Rovere



Nut

栗色

R15



Floor
R15 | 300x1800mm / 12"x72"

Wall
UL0 | 1200x2780mm / 48"x110"



Floor
R15 | 300x1800mm /12"x72"

Wall
UL13 | 1200x2780mm /48"x110"

Milk

奶白

R11



300x1800mm / 12"x72"
超大尺寸原色橡木

Finishes / 工艺

12

Faces

3-5°
Gloss

R9

Cream

米咖

R12



300x1800mm / 12"x72"
超大尺寸原色橡木

Finishes / 工艺

12

Faces

3-5°
Gloss

R9

Tan

浅棕

R13



300x1800mm / 12"x72"
超大尺寸原色橡木

Finishes / 工艺



Camel

驼色

R14



300x1800mm / 12"x72"
超大尺寸原色橡木

Finishes / 工艺



Nut

栗色

R15



300x1800mm / 12"x72"

超大尺寸原色橡木

Finishes / 工艺

12

Faces

3-5°

Gloss

R9

Technical Performance

技术参数

		试验方法 TEST METHOD	国际标准 INTERNATIONAL STANDARDS	费罗娜产品性能 FLORINA VALUE
	长度偏差 LENGTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	宽度偏差 WIDTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	厚度偏差 THICKNESS	ISO 10545-2	±5%, ±0.5mm	±1%, ±0.3mm
	表面平整度 SURFACE FLATNESS	ISO 10545-2	±0.5%, ±2.0mm	±0.5%, ±2.0mm
	边直度 STRAIGHTNESS OF SIDES	ISO 10545-2	±0.5%, ±1.5mm	±0.02%, ±0.1mm
	直角度 RECTANGULARITY	ISO 10545-2	±0.5%, ±2.0mm	±0.1%, ±1.0mm
	吸水率 WATER ABSORPTION	ISO 10545-3	Eb ≤ 0.5%	Eb ≤ 0.5%
			单个值不大于0.6% Individual maximum 0.6%	单个值不大于0.6% Individual maximum 0.6%
	破坏强度 BREAKING STRENGTH	ISO 10545-4	≥1300N	≥1300N
	断裂模数 MODULUS OF RUPTURE	ISO 10545-4	平均值≥35 Minimum 35	平均值≥35 Minimum 35
			单个值≥32 Individual minimum 32	单个值≥32 Individual minimum 32
	抗污性 STAIN RESISTANCE	ISO 10545-14	最低3级 Minimum Class 3	5级 Class 5 Livello 5 Clase5
	耐磨性 ABRASION RESISTANCE	ISO 10545-7	报告耐磨级别 Report abrasion class	3-4级 Class 3-4
			报告耐磨转数 Report cycles passed	1500
	抗冻性 FROST RESISTANCE	ISO 10545-12	经试验应无裂纹或剥落 Required	应通过此项测试 Pasa
	抗釉裂性 CRAZING RESISTANCE	ISO 10545-11	经试验应无釉裂 Required	应通过此项测试 Pasa
	防滑性 SLIP RESISTANCE	DIN 51130	从R9到R10 From R9 to R10	哑面 R9 - R10 Matt R9 - R10
		DIN 51097	A, B, C 级 Class A, B and C	哑面B级 Matt Class B -Anti-Slip Class C
		ANSI A137.1-2012	哑面 μ≥0.42 Matt μ≥0.42	哑面 μ≥0.55 Matt μ≥0.55
		AS 4586:2013 附录A AS 4586:2013 Appendix A	P0 - P5	哑面 P3 Matt P3
		GB/T 4100-2015 附录 M GB/T 4100-2015 Appendix M	μ≥0.5	地砖静摩擦系数（干法值）≥0.5 Static friction coefficient of floor tile ≥0.5

Packing Information


包装信息

规格（毫米/英寸） FORMAT(mm/in)	片/箱 PCS/BOX	平方/箱 SMQ/BOX	千克/箱 KG/BOX	箱数/托 BOX/PALLET	平方/托 SMQ/PALLET	千克/托 KG/PALLET
300x1800 12"x72"	3	1.62	40	76	123.12	3040




Laying
Proposals

费罗娜
铺贴指引


Rovere
超大尺寸
原生橡木

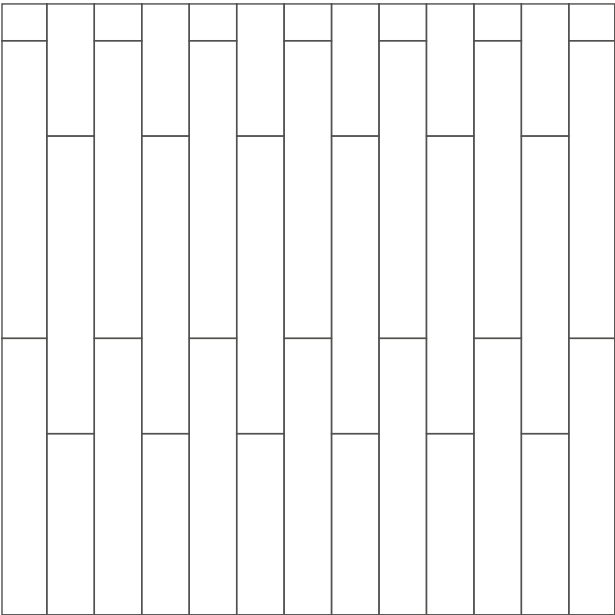


a.

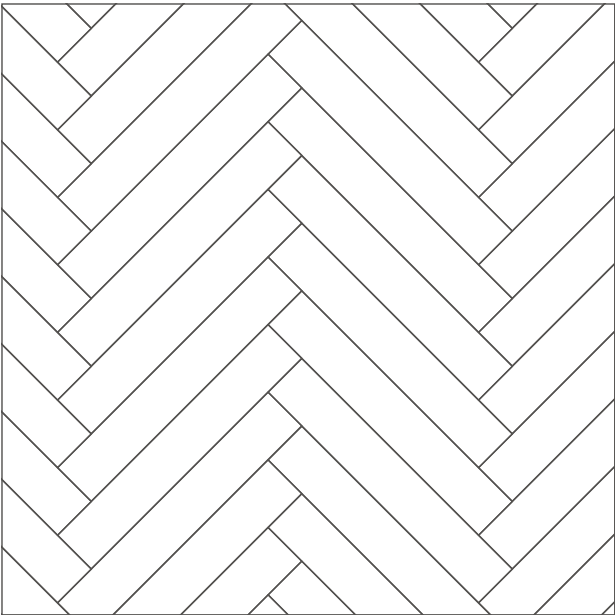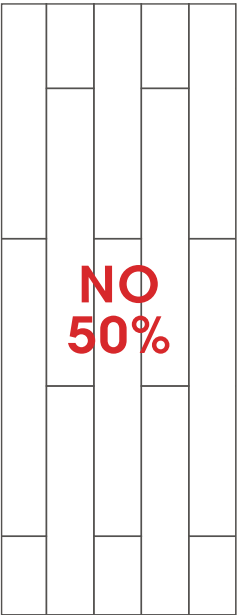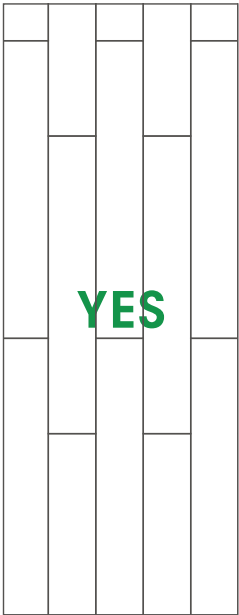


b.

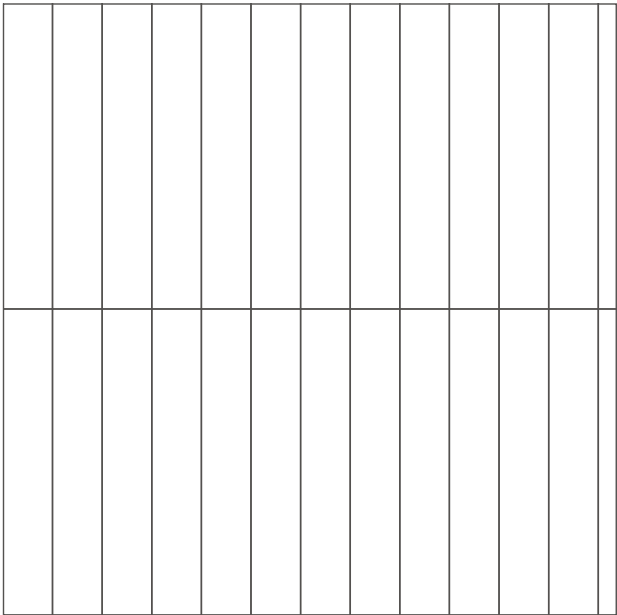

c.

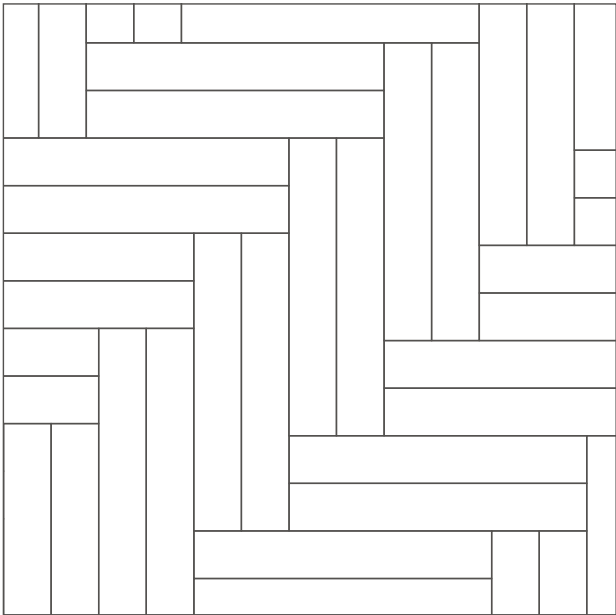

d.

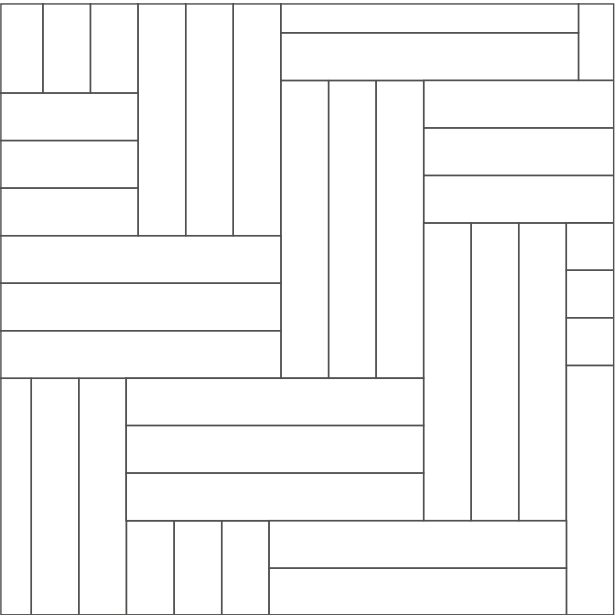

e.

▼
2-3mm
▲

在铺贴前，先检查产品的色号、尺寸等。为了使产品达到最好的效果，我们建议费罗娜的所有产品都应采用费罗娜铺贴工具（瓷砖找平器、留缝十字胶粒等）。我们建议费罗娜的产品在铺贴的时候留 2-3mm 的缝。

Before laying,it is recommended to check the color number,size and so on,in order to achieve better results;it is suggested that the special joint mixture of Florina tile be used for all products of Florina tile;There shall be a seam for paving,and it is suggested that Florina's products have a 2-3mm.